

Use current boilerplate



Sensitivity 5 mA		Voltage 120/240V AC	
kAIC Rating 10,000		Single-Phase Three-Wire	
Catalogue Number	Amperes	Breaker Type	Dimensions
CH30SPA	30	CH	11-1/2"H X 6-1/4"W X 4"D
CH40SPA	40	CH	11-1/2"H X 6-1/4"W X 4"D
CH50SPA	50	CH	11-1/2"H X 6-1/4"W X 4"D
CH60SPA	60	CH	11-1/2"H X 6-1/4"W X 4"D
WITH FACTORY INSTALLED AUDIBLE ALARM (includes Panel & Breaker)			
CH30SPALARM	30	CH	11-1/2"H X 6-1/4"W X 4"D
CH40SPALARM	40	CH	11-1/2"H X 6-1/4"W X 4"D
CH50SPALARM	50	CH	11-1/2"H X 6-1/4"W X 4"D
CH60SPALARM	60	CH	11-1/2"H X 6-1/4"W X 4"D
AUDIBLE ALARM KIT FOR FIELD INSTALLATION			
CHSPALARM - 1 KIT FOR ALL AMPERE RATINGS (Panel & Breaker not incl.)			



Ground Fault Protection Kit



CSA Approved
Enclosed Ground
Fault Circuit
Breaker for Hot
Tubs, Whirlpools
and Pool Pumps



Eaton Electrical

Burlington, ON Canada

Publication No. SA.31.13C.S.K
June 2006
Printed in Canada

Copyright Eaton Electrical, 2004
All Rights Reserved


EATON

Cutler-Hammer

The Cutler-Hammer Ground Fault Protection Kit from Eaton Electrical

It's the Best and Easiest Way to Meet CEC Requirements While Saving Time and Money

CEC Rule 68-086 (1) and (6) requires a Ground Fault Circuit Interrupter, of a Class A Type, to be installed not closer than 3 M (10 feet) to pool or spa water.

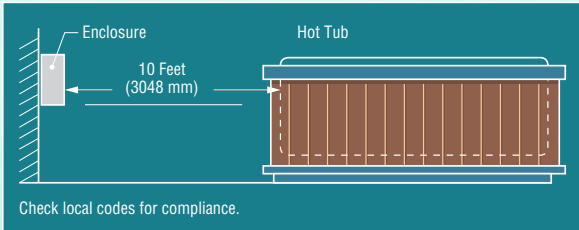

Cutler-Hammer Ground Fault Circuit Interrupters (GFCIs) trip on a ground fault, and may also serve as a disconnect switch to turn the pump on and off.



A Factory-Assembled Unit Means Quicker and Easier Installation for You

- It's delivered assembled, prewired, factory tested, and ready to install. No more expensive, time-consuming on-site assembly of multiple parts.
- Preinstalled neutral and ground bars.
- Door swings up and stays open for easy interior access.
- Bottom feed or top feed using a bolt-on raintight hub.
- Audible alarm option, field or factory installed.

Designed for Your Customers' Safety

- 2 additional 1P circuits for lighting and receptacles.
- Interior deadfront cover is held securely in place, providing protection against contact with energized parts.
- The padlockable door helps prevent tampering or having the switch turned on or off by unauthorized personnel.
- Your customers can make certain the GFCI is operating properly by using the push-to-trip button.

PROTECTION


Plus

15 Years Warranty on the Rugged Type CH Enclosure

- NEMA Type 3R rainproof, welded steel construction.
- Tough powder-coat painted galvanized steel enclosure stands up to all types of weather conditions.

Five Years on the World's Best Ground Fault Circuit Interrupter

The heart of the kit is the two-pole CSA approved Cutler-Hammer GFCI that includes a state-of-the-art electronic package that monitors the circuit and trips when it detects a ground fault of five milliamperes or greater.

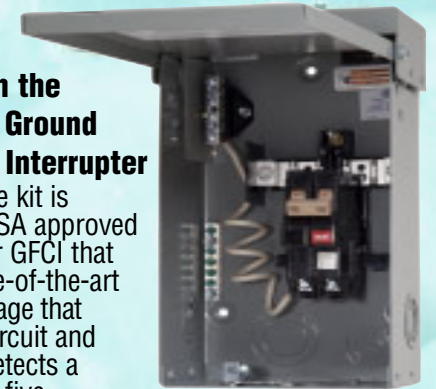

Optional Audible Alarm

- Especially important when freezing conditions exist.
- Alarm identifies the breaker has tripped, signifying power is shut off to the hot tub.
- Resetting a tripped breaker helps prevent costly expense and damage to the hot tub.
- Factory installed or field installation kit available.

Hot tub photos courtesy of Emerald Spa Corporation